

(19) World Intellectual Property
Organization
International Bureau



31 MAY 2004



(43) International Publication Date
17 June 2004 (17.06.2004)


PCT

(10) International Publication Number
WO 2004/051172 A2

- (51) International Patent Classification⁷: F28F 812-8, 2/3, Mandeok 1-Dong, Buk-Ku, 616-830 Busan (KR). LEE, Sung-Hwa [KR/KR]; Towol Sungwon Apt. 503-402, Sangnam-Dong, 641-781 Changwon, Kyungsangnam-Do (KR).
- (21) International Application Number: PCT/KR2002/002265
- (22) International Filing Date: 2 December 2002 (02.12.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): LG ELECTRONICS INC. [KR/KR]; 20, Yoido-Dong, Yongsungpo-Ku, 150-010 Seoul (KR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SHIN, Soo-Yeon [KR/KR]; Booyoung Apt. 1202-902 Wolsan maeul, Boogok-Li, Jangyu-Myeon, 621-833 Gimhae, Kyungsangnam-do (KR). LEE, Seong-Hwan [KR/KR]; Woosong Apt. 102-1303, Namyang-Dong, 641-091 Changwon, Kyungsangnam-Do (KR). CHO, Min-Chul [KR/KR];
- (74) Agent: PARK, Jang-Won; Jewoo Bldg. 5th Floor, 200 Nonhyun-Dong, Kangnam-Ku, 135-010 Seoul (KR).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HEAT EXCHANGER OF VENTILATING SYSTEM

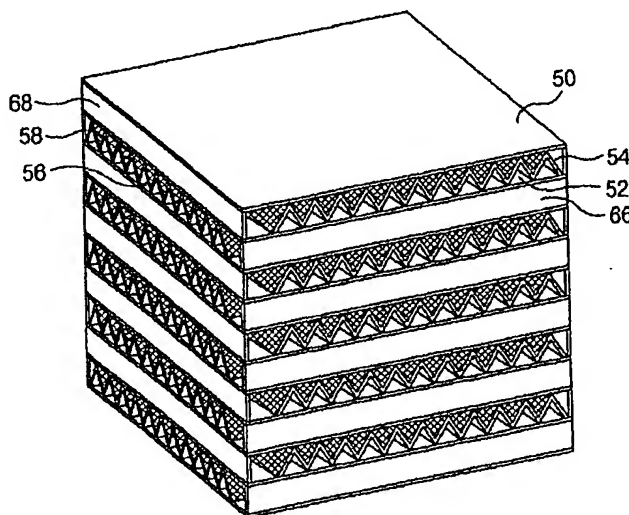

(57) Abstract: A heat exchanger of a ventilating system, including a plurality of heat exchanging plates which are laminated at a predetermined interval, a first heat exchange member which is laminated among the heat exchanging plates and is formed in a mesh type to increase turbulence of the outdoor air which flows while being attached on a first air path through which outdoor air passes and a second heat exchange member which is laminated among the heat exchanging plates crossed with the first heat exchange member and is formed in a mesh type to increase turbulence of indoor air which flows while being attached on a second air path through which the outdoor air passes can improve heat transfer performance by increasing turbulence of air by positioning a mesh type heat exchange in a air path through which outdoor and indoor air passes.

WO 2004/051172 A2